

Buffered Fiber Matrix KG500

Product Properties

Fast curing speed, low modulus, easy stripping, fire retarding.

Characteristics

Liquid Coating

	Typical Value
Viscosity (25°C)	3600 cps
Refractive Index (23°C)	1.494
Density (23°C)	1.10 kg/l

Cured Film

	Typical Value
By DMA	
Temperature when E'=1000Mpa	2.2°C
Temperature when E'=100Mpa	46.2°C
Modulus at 2.5% strain	110MPa
Elongation	25%
Tensile strength	13MPa
Curing speed (at 95% of relative curing degree)	0.10J/cm ²
Shrinkage upon curing	3.70%
Refractive Index (23°C)	1.512
Weight loss	
8 weeks at 85°C	-5.86%
8 weeks at 125°C	-5.95%


Storage Conditions

KG coatings is available in 10kg plastic bottle which prevent exposure of the content to UV light. It is recommended that KG coatings be stored in a dry place in unopened, undamaged, original containers at temperatures between 0°C and 35°C. Storage or shipment in cold conditions may result in a phase separation which is reversible and is corrected by heating for 24 hours at 40°C .

Shelf Life


KG500 has a recommended shelf life of 12 months from the date of manufacture, provided that the above stated storage conditions are properly maintained.

Viscosity Vs. Temperature

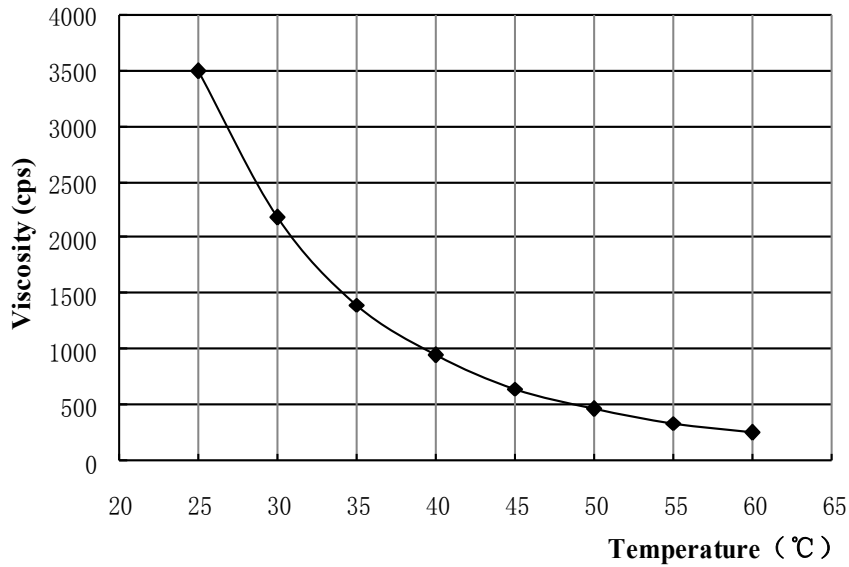

1 cps = 1 mPa · s

Dynamic Properties vs Temperature

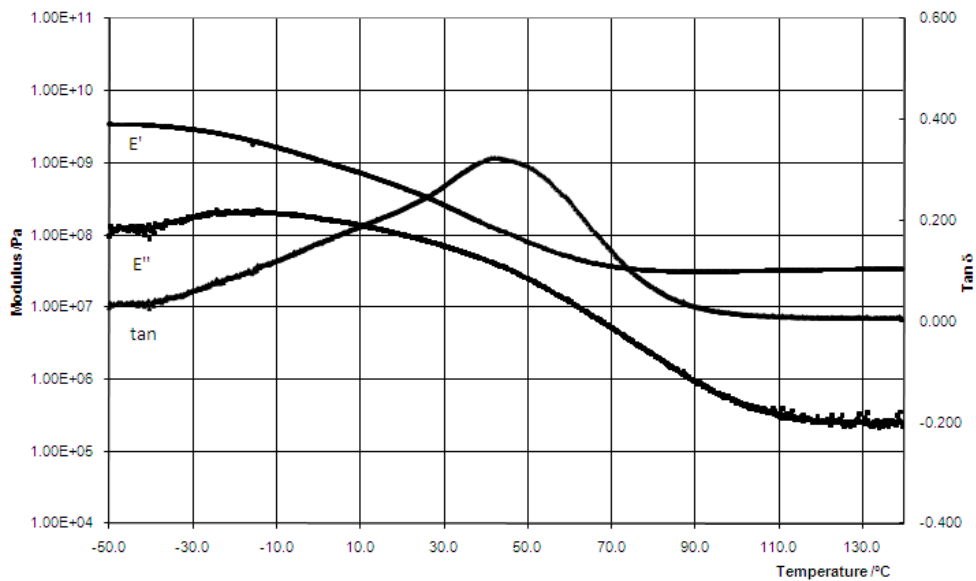

The data contained herein are based on Phichem lab test result and are believed to be reliable. Phichem recommends that the users take test to determine the suitability of a product in particular processing or application/use.